


hotcontrol ring


The special construction for temperature measurement on heated mold plates, machine components or similar applications enables redundant measurement to minimize measurement errors.



Thermocouples exposed out of ring

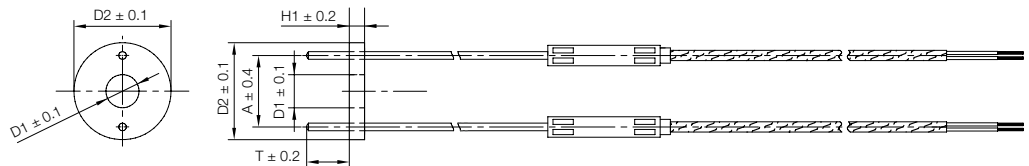

Thermocouples flat with ring

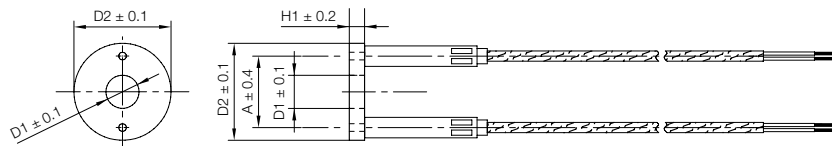

Options

Item No. type J	Item No. type K	D	T	A	D1	D2	H1	Thermocouple
CPYC12004A	CPYC12020C	1.5	9	14.8	6.5	19	1.5	exposed out of ring
CPYC12013C	CPYC12021D	1.5	30	14.8	6.5	19	1.5	exposed out of ring
CPYC12014D	CPYC12022E	1.5	40	14.8	6.5	19	1.5	exposed out of ring
CPYC12015E	CPYC12023F	1.5	50	14.8	6.5	19	1.5	exposed out of ring
CPYC12016F	CPYC12024G	1.5	9	14.6	6.3	19.4	1.5	exposed out of ring
CPYC12017G	CPYC12025H	1.5	9	14	6.5	19	3	exposed out of ring
CPYC12018H	CPYC12026I	3	-	14	6.5	19	3	flat with ring
CPYC12019I	CPYC12027J	1.5	10	13.5	6.4	18	1.5	exposed out of ring

Other dimensions and connection cables available upon request.

